



MODEL: GT-BS02

Oder Code	GT-BS02
LED	5W/Pcs
Row	Single Row
Optic System	Side Emitting Reflector
Operating Voltage	10-30V DC
Operating Temp	-40~+80 °Celcius
Beam Pattern	Driving Light Beam
ColorTemperature	6000K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Housing Height	40.7mm
Coating Powder	Sand Black
Mounting System	304 Stainless Steel Side Mount Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	Ip67
EMC Protection	ECE R10, CISPR 25 Class 3
Beam Type Protection	ECE R112

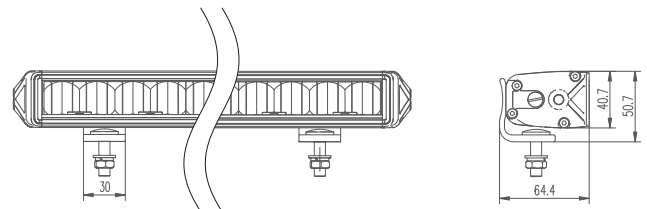

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BS02-8L	9.80"	40W	2.00A@12V, 1.00A@24V	8PCS*5W GW PLLRA1.PM	3000Lm	400mm	0.65Kg/Pcs	10Pcs/Carton
GT-BS02-12L	13.80"	60W	3.00A@12V, 1.50A@24V	12PCS*5W GW PLLRA1.PM	4500Lm	600mm	1.00Kg/Pcs	8Pcs/Carton
GT-BS02-16L	17.90"	80W	4.00A@12V, 2.00A@24V	16PCS*5W GW PLLRA1.PM	6000Lm	800mm	1.35Kg/Pcs	6Pcs/Carton

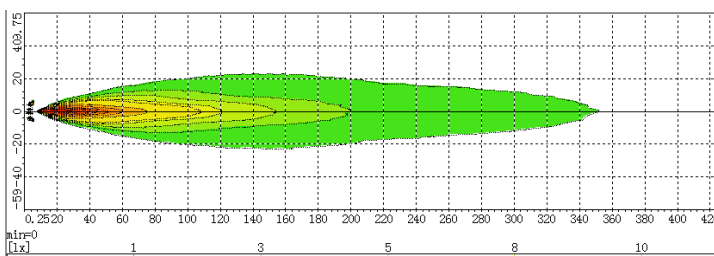

1lx@352meters(12L)

